



- Suitsu äratõmbe andur "2-traadiga", 24V mudel krohvi peale monteerimiseks
 - vastab DIN 14655 normile
 - lukustatav plastikkorpus, hall (RAL 7035) purustatava klaasi ja võtmega
 - funktsioonid:
 - AVATUD
 - alarm ja kontrollnäit
 - saab kasutada ainult koos edastusmooduliga UM 41-Z ja D+H-24V-suitsuventilatsiooni juhtpaneeliga (välja arvatud RZN 4202)
 - suitsuventilatsiooni tähis saadaval riigikeelles
 - saadaval ka: punane (RAL 3000), sinine (RAL 5009) ja kollane (RAL 1004)

RT 42-Z



- smoke vent button "two-wire",
24V-design for surface mounting
 - following DIN 14655
 - plastic housing lockable, colour grey
(RAL 7035) with break-type glass and key
 - functions:
 - **OPEN**
 - alarm display and pilot light
 - only applicable in conjunction with transmission module UM 41-Z and D+H-24V-smoke vent control panel (except for RZN 4202)
 - possibility of smoke vent sign
in national language
 - also available in red (RAL 3000),
blue (RAL 5009) and yellow (RAL 1004)

RT 42-F



smoke vent button "radio control", design for surface mounting
plastic housing lockable in grey (RAL7035)
with break-type glass and key
battery-operated transmitter for triggering of ,
smoke vent flaps, inclusive 9V-battery
functions:
■ OPEN
only applicable in conjunction with transmission module ES 1218 and D+H-24V-smoke vent control panel (except for RZN 4202)
possibility of smoke vent sign
in national language

Mudel	art nr	L x K x S/mm	kaal	märkus
Type	Ord.-No.	W x H x D/mm	Weight	Comment
RT 43-H	I	123 x 123 x 37	0,25kg	VdS peamine juhpaneel, oranž VdS main control panel, orange
RT 43-N	30.450.00	123 x 123 x 37		VdS täiendav juhpaneel, oranž VdS second. control panel, orange
RT 42 RT	30.450.10	123 x 123 x 37	0,25kg	hall (RAL 7035) grey (RAL 7035)
42-R RT	I	123 x 123 x 37	0,25kg	punane (RAL 3000) red (RAL 3000)
42-B RT	30.420.00	123 x 123 x 37	0,25kg	sinine (RAL 5009) blue (RAL 5009)
42-G	30.430.10	123 x 123 x 37	0,25kg	kollane (RAL 1004) yellow (RAL 1004)
RT 42-H	30.430.00	123 x 123 x 37	0,25kg	peamine juhpaneel, hall main control panel, grey
RT 42-H-R	30.430.20	123 x 123 x 37	0,25kg	peamine juhpaneel, punane main control panel, red
RT 42-H-B	30.423.40	123 x 123 x 37	0,25kg	peamine juhpaneel, sinine main control panel, blue
RT 42-H-G	30.423.50	123 x 123 x 37	0,25kg	peamine juhpaneel, kollane main control panel, yellow
RT 42-U	30.423.30	160 x 160 x 48		fluskinnitus, hall flush mounted design, grey
	30.423.70			
RT 42-ST		123 x 123 x 37		nupp "rike", hall button

mudel	art nr	L x K x S/mm	kaal	märkus	
Type	Ord.-No.	W x H x D/mm	Weight	Comment	
RT 42-2	30.435.40	123 x 123 x 37	0,25kg	2-kordne mudel, hall double design, grey	
RT 42-3	30.435.50	123 x 123 x 37	0,25kg	3-kordne mudel, hall triple design, grey	
RT 42-FR	30.435.20	135 x 186 x 113	0,70kg	niisikete alade nupp, hall button for damp areas, grey	
RT 41	30.440.30	126 x 126 x 43	0,70kg	alumiiniumkorpus, hall aluminium housing, grey	
RT 41-IP 54	63.600.33	----	0,05kg	kaitsesüsteemi täiendav komplekt RT 41 set f. extension of protective system RT 41	
RT 42-Z	30.435.60	123 x 123 x 37	0,25kg	2-traadiga nupp, hall two-wire button, grey	
UM 41-Z	30.526.10		0,05kg	edastusmodul RT 42-Z jaoks transmission module for RT 42-Z	30/01
RT 42-F	30.435.30	123 x 123 x 50	0,45kg	raadiotunnup, hall button with radio control, grey	10/01
ES 1218	30.435.90	120 x 80 x 56	0,40kg	vastuvõtja RT 42-F jaoks, seinale montereeritav receiver for RT 42-F, surface type	9,711

Suitsu äratōmbe andur



RT 43 / RT 42 / RT 41

Product Information

- for 24V D+H-smoke vent control panels
 - various designs
 - in 5 different colours available
 - smoke vent sign in national language possible


In case of fire the smoke vent buttons RT 43, RT 42 and RT 41 are used for the manual release of the system, in connection with D+H smoke vent systems of the type RZN. In addition the operation and alarm conditions are displayed (except RT 42-F).
The types RT 43-H und RT 43-N are approved by VdS as smoke vent control panels according to the guidelines no. 2592.
Due to the large range of types, almost every structural requirement is fulfilled.

Õigus teha tehnilisi muudatusi.
Rights to technical modifications reserved.

© 2003 D+H Mechatronic, Ammersbek

Tootevalik

Suitsu ventilatsiooninupp, 24V krohvi peale monteeritav mudel vastavalt VdS direktiivile 2592
lukustatav ABS oranž plastikkorpus (RAL 2011) purustatava klaasi ja võtmega
saadaval peamise juhtpaneelina ja (RT-H) lisapaneelina (RT-N)
Funktsioonid:
■AVATUD-SULETUD
■alarm- ja kontrollnäidud
■rikkendäit (ainult RT-H puhul)
SULETUD nupp on kaetud

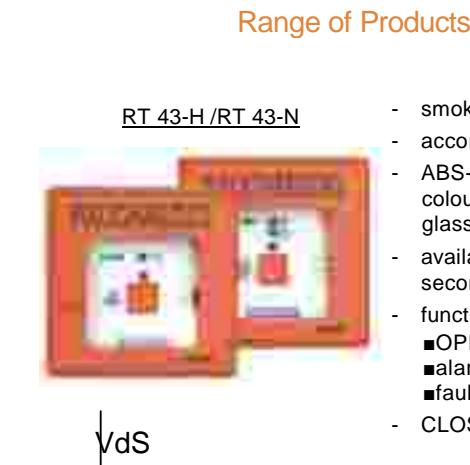

Range of Products

RT 43-H / RT 43-N

- smoke vent button, 24V-surface type design,
- according to VdS-guideline 2592
- ABS-plastic housing lockable colour orange (RAL 2011) with break-type glass and key
- available as main control panel (RT-H) and secondary control panel (RT-N)
- functions:
 - OPEN-CLOSED
 - alarm display and pilot light
 - fault indication (only in case of RT-H)
- CLOSED-button concealed

- Suitsu ventilatsiooninupp, 24V krohville monteeritav mudel
- vastavalt DIN 14655
- lukustatav plastikkorpus purustatava klaasi ja võtmega
- Funktsioonid:
■AVATUD-SULETUD
■alarm- ja kontrollnäidud
- SULETUD nupp on kaetud
- suitsuventilatsiooni tähis saadaval riigikeeles
- variandid: hall (RAL7035), punane (RAL 3000), sinine (RAL 5009) ja kollane (RAL 1004)



Range of Products

Range of Products

RT 42-ST




Tootevalik

suitsuventilatsiooninupp "rikkenäit", 24V krohvi peale kinnitatav mudel vastavalt DIN 14655
lukustatav hall plastikkorpus (RAL 7035) purustatava klaasi ja võtmega
funktsioonid:
■ AVATUD-SULETUD
■ alarm-, kontroll-, ja aktiveerimisnäit
■ optiline rikkenäit
■ väljalülitatav helisignal (70db, sumisti sagedus 400Hz, impuls sagedus 0,5Hz)
kasutatav ka lisaekraani paneelina KINNI-nupp ja alarmi väljalülitus varjatud suitsuventilatsiooni tähis saadaval riigikeeles lisavariandid: punane (RAL 3000), sinine (RAL 5009) ja kollane (RAL 1004)
saadaval ka krohvi alla monteeritavana

2- või 3-kordsed suitsuventilatsiooni nupud, 24V krohvi peale monteeritav vastavalt DIN 14655
lukustatav hall plastikkorpus (RAL 7035) purustatava klaasi ja võtmega
funktsioonid:
■ AVATUD-SULETUD (2-kordne või 3-kordne)
■ 2 x või 3 x alarm- ja 1 x kontrollnäit
KINNI-nupp varjatud suitsuventilatsiooni tähis saadaval riigikeeles saadaval ka: punane (RAL 3000), sinine (RAL 5009) ja kollane (RAL 1004)
saadaval ka krohvi alla monteeritavana

suitsuventilatsiooni nupp, 24V seinkinnitus niisketele ruumidele ja välja monteerimiseks, IP 55
hall plastikkorpus (RAL 7035) plommitud läbipaistva klapitava kaanega
funktsioonid:
■ AVATUD-SULETUD
■ 2 x või 3 x alarm- ja 1 x kontrollnäit suitsuventilatsiooni tähis saadaval riigikeeles

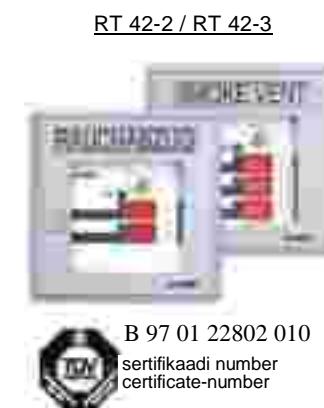

RT 42-2 / RT 42-3

Tootevalik

suitsuventilatsiooninupp "fault indicator", 24V surface type design following DIN 14655
plastic housing lockable colour grey (RAL 7035) with break-type glass and key functions:
■OPEN-CLOSED
■alarm display pilot light and trigger indication
■visual fault indicator
■acoustical fault signal disconnectable (70db, buzz freq. 400Hz, impulse freq. 0,5Hz)
applicable as secondary display panel as well CLOSED button and alarm switching off concealed

possibility of smoke vent sign in national language also available in red (RAL 3000), blue (RAL 5009) and yellow (RAL 1004)
also available for flush mounting

smoke vent button double or triple, 24V-surface type design following DIN 14655 plastic housing lockable, colour grey (RAL7035) with break-type glass and key functions:
■OPEN-CLOSED (double or triple)
■2 x or 3 x alarm displays and 1 x pilot light
CLOSED-button concealed possibility of smoke vent sign in national language also available in red (RAL 3000), blue (RAL 5009) and yellow (RAL 1004)
also available for flush mounting

smoke vent button, 24V-surface type design for mounting in damp areas and outside, IP 55 plastic housing in grey (RAL 7035) with lead-sealed transparent hinged cover functions:
■OPEN-CLOSED
■alarm display and pilot light possibility of smoke vent sign in national language

Tootevalik

suitsuventilatsiooni nupp, 24V seinkinnitus vastavalt DIN 14655
lukustatav alumiiniumist hall valukorpus (RAL 7035) purustatava klaasi ja võtmega
funktsioonid:
■ AVATUD-SULETUD
■ alarm- ja kontrollnäit
KINNI-nupp varjatud suitsuventilatsiooni tähis saadaval riigikeeles saadaval kaitsesteemi täiendamise komplekt (IP 54)

smoke vent button, 24V-surface type design following DIN 14655 aluminium diecasting housing lockable in grey (RAL 7035) with break type glass and key functions:
■OPEN-CLOSED
■alarm display and pilot light
CLOSED-button concealed possibility of smoke vent sign in national language set for extension of protective system (IP 54) available

smoke vent button, 24V-surface type design following DIN 14655 aluminium diecasting housing lockable in grey (RAL 7035) with break type glass and key functions:
■OPEN-CLOSED
■alarm display and pilot light
CLOSED-button concealed possibility of smoke vent sign in national language set for extension of protective system (IP 54) available

RT 42



RT 42-H



RT 42-U

suitsuventilatsiooni nupp, 24 krohvi alla monteeritav vastavalt DIN 14655
lukustatav hall plastikkorpus (RAL 7035) purustatava klaasi ja võtmega
funktsioonid:
■ AVATUD-SULETUD
■ alarm ja kontrollnäit
SULETUD nupp on kaetud suitsuventilatsiooni tähis saadaval riigikeeles lisavariandid: punane (RAL 3000), sinine (RAL 5009) ja kollane (RAL 1004), saada mõõtus: LxKxS = 140x140x60mm

Range of Products

RT 41

