


## Example of application

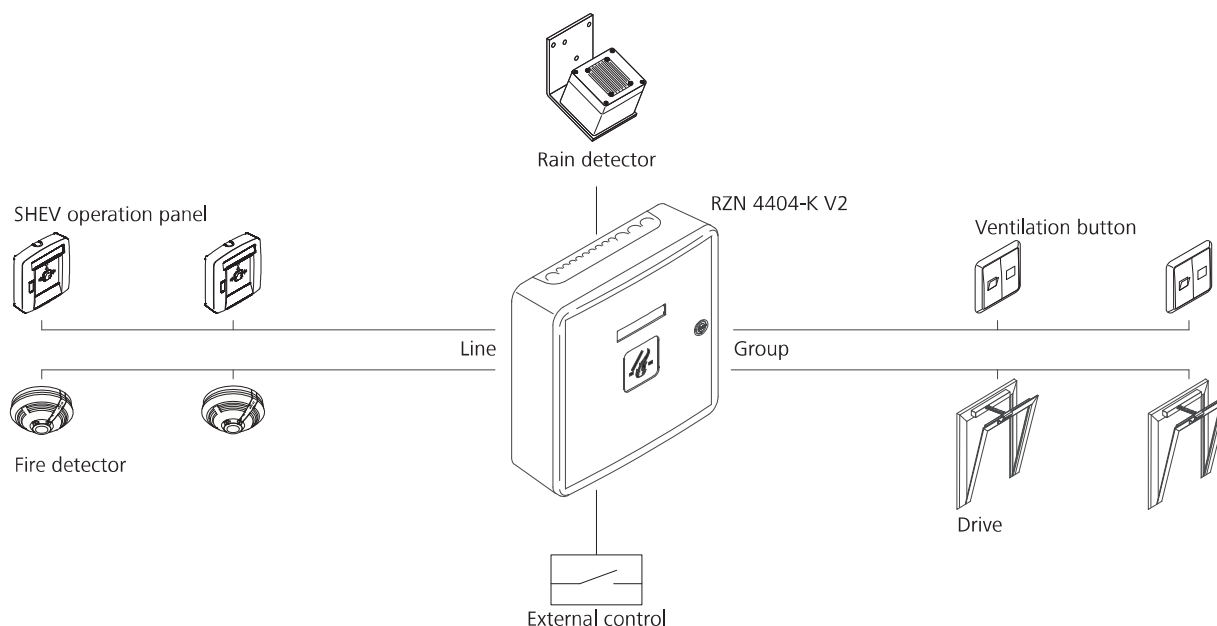

## Technical data

	RZN 4404-K V2
Supply	230 V AC / 50 Hz / 120 VA
Stand-by power	5.8 W
Output	24 V DC / 4 A
Mode of operation monitoring	Continuous duty
Mode of operation Alarm / Ventilation	Short-time duty 30 % duty cycle
Temperature range	-5 °C ... +40 °C
Line / Group	1 / 1
Battery type	Typ 2 (2x)

Batteries must be ordered separately.

## Approvals / Certificates

Find out about permission details from your D+H Partner.



G 501002



0786-CPD-50383

Article also available with the following permissions under other article numbers. Technical data may deviate.



## Design

Type	Art. No.	Type of protection	W x H x D	Weight	Remark
ZP-RZN 4404-K V2	30.102.23			2.00 kg	With alarm devices = Akku Typ 8 (2x)
RZN 44xx-K/M	30.104.70				Variable equipment possible
GEH-S-RWA	30.105.30	IP 54	400 x 300 x 120 mm	7.25 kg	Sheet steel housing
GEH-KST	63.600.81	IP 30	310 x 310 x 100 mm	1.40 kg	Plastic housing

# RZN 4404-K V2



## Performance features

- » Compact SHEV control panel, specifically for stairwells
- » Up to 4 A total drive current
- » Stabilised output voltage
- » Switchable SHEV safety functions: Fault equal to alarm, SHEV retriggering function and smoke detector remote reset
- » Integrated comfort functions for daily ventilation
- » 1 slot for an additional module
- » Optional connection to rain detectors or wind / rain sensors without an additional module
- » Connection of up to 8 SHEV operation panels and 14 fire detectors per line (Only detectors permitted by D+H may be used)
- » Min. 72 hr battery backup supply

## Accessories

Batteries	Sheet steel housing	Plastic housing	SHEV operation panels	Sensor systems
				
starting on page 92	Page 63	Page 63	starting on page 78	starting on page 140