


Example of application

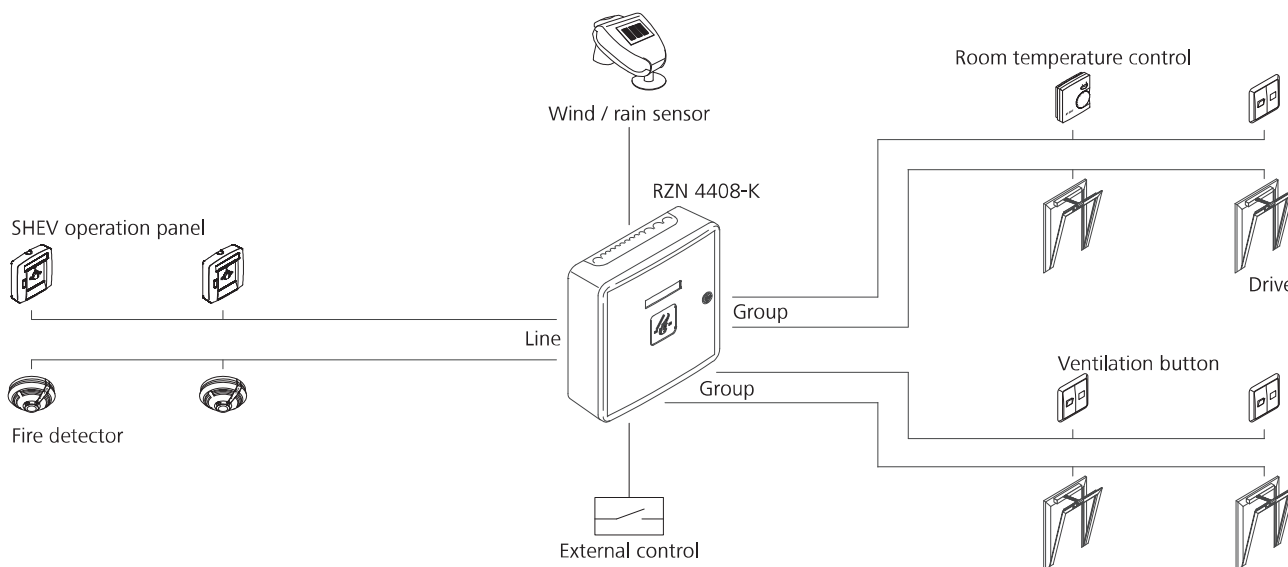

Technical data

	RZN 4408-K
Supply	230 V AC / 50 Hz / 240 VA
Stand-by power	4.5 W
Output	24 V DC / 8 A
Ripple	< 2 V _{ss}
Mode of operation monitoring	Continuous duty
Mode of operation Alarm / Ventilation	Short-time duty 30 % duty cycle
Temperature range	-5 °C ... +40 °C
Line / Group	1 / 2
Battery type	Typ 8 (2x)

Batteries must be ordered separately.

Approvals / Certificates

Find out about permission details from your D+H Partner.



G 506001



0786-CPR-50382


Article also available with the following permissions under other article numbers. Technical data may deviate.



Design

Type	Art. No.	Type of protection	W x H x D	Weight	Remark
ZP-RZN 4408-K	30.117.30			2.90 kg	With alarm devices = Akku Typ 3 (2x)
RZN 44xx-K/M	30.104.70				Variable equipment possible
GEH-S-RWA	30.105.30	IP 54	400 x 300 x 120 mm	7.25 kg	Sheet steel housing
GEH-KST	63.600.81	IP 30	310 x 310 x 100 mm	1.40 kg	Plastic housing

RZN 4408-K

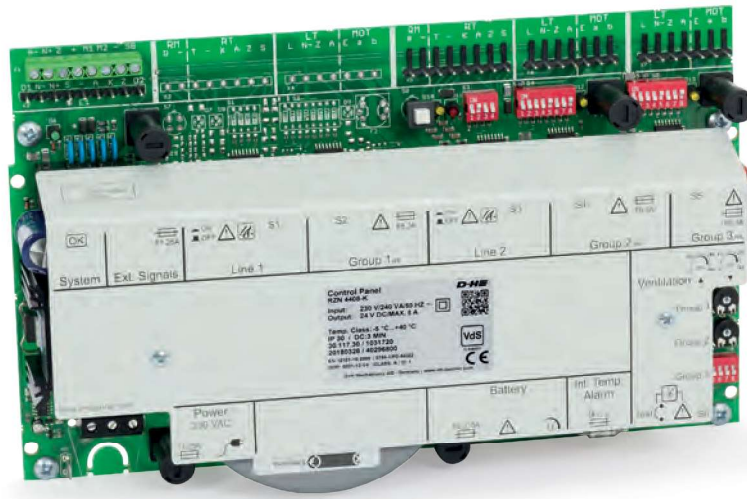

Performance features

- » Compact SHEV control panel - AdComNet ready
- » Up to 8 A total drive current
- » Stabilised output voltage
- » Switchable SHEV safety functions: Fault equal to alarm, SHEV retriggering function and smoke detector remote reset
- » Option to combine SHEV / building alarm function
- » Integrated comfort functions for daily ventilation
- » 1 slot for an additional module
- » Optional connection to rain detectors or wind / rain sensors without an additional module
- » Connection of up to 8 SHEV operation panels and 14 fire detectors per line (Only detectors permitted by D+H may be used)
- » Min. 72 hr battery backup supply

Accessories

Batteries	Sheet steel housing	Plastic housing	SHEV operation panels	Sensor systems
				
starting on page 92	Page 65	Page 65	starting on page 78	starting on page 140